


New

# ENVIROSCAPE™

The ultimate ground-reinforcement system.

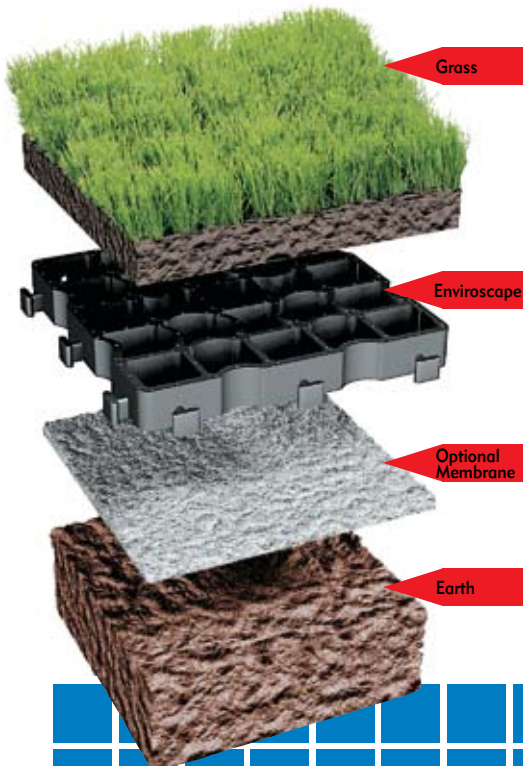

 **EnviroScape® Maintenance-Free, Tough & Durable**

# ENVIROSCAPE™

Enviroscape is a unique system comprising of individual, interlocking square tiles (330mm x 330mm) to strengthen a gravelled or grassed surface area. Enviroscape can be filled with stone or earth, or seeded.

## FEATURES

■ Enviroscape is available in two sizes, 30mm deep and 50mm deep. (Enviroscape 50 has been MOD and NATO approved, where the product has been on a 2 year trial.) The two sizes can be fitted together in areas where varying load capacities and ground levels are required.



■ The tiles are manufactured from 100% recycled Enviropol® material (post consumer waste). Enviroscape is tough and durable, environmentally friendly and recyclable after its usable service life.

■ Enviroscape is maintenance-free. It is weather resistant, and will not rot, crack or corrode. The product has a long usable life.



■ Enviroscape has a TUV approved load capacity of up to 250 tonnes for 30mm, and up to 350 tonnes for 50mm, strong enough to take heavy vehicles.



■ A problem can occur when a vehicle drives over grassy areas. The grass can become muddy and uneven making it extremely difficult for vehicles to manoeuvre over the area. Enviroscape offers an effective solution, keeping the surface even and consistent, and adding strength and durability to withstand heavy vehicles.



■ Integral expansion allows the individual tiles to expand and contract without buckling and separating in extreme weather conditions. There is no need for additional expansion joints.

■ Enviroscape has an interlocking fastening system. There is no need for specialised installation tools as the system is quick and easy to install. Up to 100 square metres can be laid per hour, per person. Edges and curves can be cut using any standard cutting equipment.



## Enviroscape can be applied to many different areas including:

- Gravel Driveways
- Footpaths and Walkways
- Ground strengthening for landscaping
- Golf Courses
- Equestrian Training Facilities
- Overflow Parking
- Caravan Parks
- Tree Beds
- Construction Site Roads



## Installing Enviroscape

- For all installations a site survey must be carried out to establish the suitability of the sub-base structure for your load bearing requirements.
- An engineering base made up of gravel or gravel/soil mix may be required to withstand the load of vehicles. The required depth of the engineering base will vary dependent on the weight of individual vehicles anticipated to use the installation.
- For gravel installations, the engineering base should be made up of gravel alone and for grass installations a mixture of gravel and soil should be used to allow for root growth.
- A geotextile membrane may be used below the engineering base to prevent root growth.
- During installation, Enviroscape should be laid on a level surface from a fixed point outwards. The interlocking 1 metre square sections can be laid speedily and easily (approximately 100 square metres per hour, per person).
- Enviroscape can be cut and shaped using standard cutting equipment.
- Once laid, the tiles can be filled with gravel. (The grids will require topping-up with gravel approximately 4 weeks after initial installation due to compacting.)
- For grassed installations, fill with a mixture of soil, sand and fertilizer, adding the grass seed (as recommended by the seed supplier).



# Specifications

	30mm	50mm
Width	330mm	330mm
Depth	330mm	330mm
Height	30mm	50mm
Load Capacity	Up to 250 tonnes	Up to 350 tonnes
Tile Weight	0.7kg	1.2kg
Weight per square metre	6.3kg	10.8kg
Colour: Black		
Material: Enviropol® Recycled Material		
Enviroscape is available in packs of 9 tiles (1m <sup>2</sup> )		




# Optional Extras



**White Parking Markers** - Available in two sizes, 30mm deep and 50mm deep, to fit both sizes of tiles. Once Enviroscape has been installed, parking markers are simply snapped into position onto the tiles.



**For More Information** on other Glasdon products, please contact our Sales Office by Telephone 01253 600410 or Fax 01253 792558.

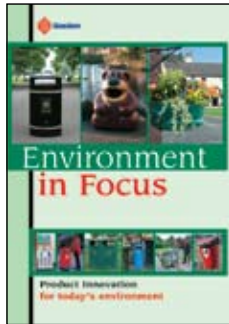

**VISIT OUR NEW WEBSITE**  
**[www.glasdon.com](http://www.glasdon.com)**

*Our website is updated regularly. Check out our New Products section and our user Case Studies page. Downloadable product literature, video clips and product instruction manuals are also available.*



**Glasdon®**

**Glasdon U.K. Limited**

Preston New Road  
 BLACKPOOL  
 Lancashire  
 FY4 4UL

Tel: (01253) 600410  
 Fax: (01253) 792558  
 e-mail: [sales@glasdon-uk.co.uk](mailto:sales@glasdon-uk.co.uk)  
 web: [www.glasdon.com](http://www.glasdon.com)



## Free Delivery In Mainland UK & Northern Ireland

Our national distribution network ensures prompt delivery in mainland UK and Northern Ireland. All our prices are carriage-free on the mainland and Northern Ireland for orders over £50 value, only VAT will be added. However, to help offset the cost of packing, administration and delivery, there is a small charge of £5 on orders below the value of £50.

Glasdon, Enviropol and Enviroscape are trademarks or registered trademarks of GLASDON GROUP or its subsidiaries in the UK and other countries.



The wood pulp used in the manufacture of this paper is from sustainable forests. This Recycled Paper is made from de-inked post-consumer waste and mill broke, and is Totally Chlorine Free.